



# 2019 MODEL YEAR SPECIFICATIONS

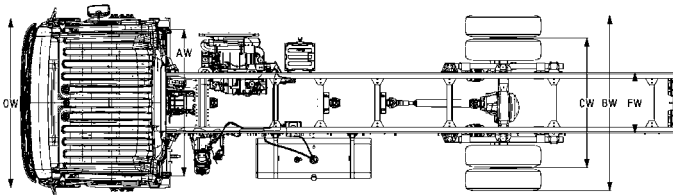

Wheelbase (in.)	Cab to Axle (CA-in.)	Cab to End of Frame (CE-in.)	Back of Cab (BOC-in.)	Overall Length (OAL-in.)	Body Lengths (ft.)	Overall Width (OW-in.)	Axle Width (AW-in.)	Overall Height (OH-in.)
152	127.0	192.9	3.0	274.4	14-16	93.5	81.1	112
170	145.0	220.0	3.0	301.5	18	93.5	81.1	112
188	163.0	247.0	3.0	328.5	20	93.5	81.1	112
200	175.0	264.9	3.0	346.4	22	93.5	81.1	112
212	187.0	283.1	3.0	364.6	24	93.5	81.1	112
224	199.0	301.0	3.0	382.5	26	93.5	81.1	112
236	211.0	319.1	3.0	400.6	28	93.5	81.1	112
248	223.0	337.0	3.0	418.5	30	93.5	81.1	112

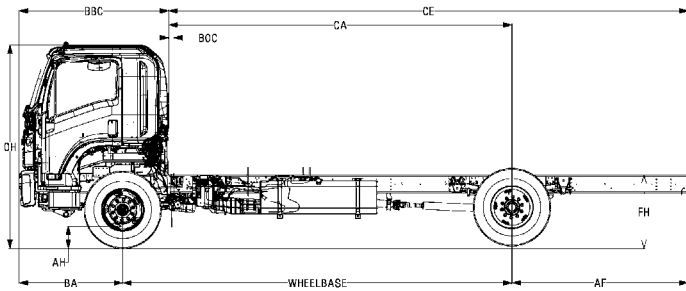

**GVWR/GCWR** 25,950/30,000 lbs.

**BODY/PAYLOAD ALLOWANCE** 14,641-15,690 lbs.

**GAWR**  
**Front** 12,000 lbs.  
**Rear** 19,000 lbs.

**FRONT AXLE CAPACITY** 12,000 lbs.

**REAR AXLE CAPACITY** 19,000 lbs.  
**Ratio** 6.17

**SUSPENSION F/R SPRINGS** Tapered/Multi-Leaf  
**Capacity** 12,000/21,000 lbs.

**SERVICE BRAKES** Full Air Dual Circuit with ABS  
**Front/Rear** S-CAM Drum Automatic Adjust

**EXHAUST BRAKE** Standard

**TRANSMISSION** Allison 2550 RDS 6-speed Automatic

**ENGINE** Isuzu 4HK1-TC turbocharged intercooled diesel

**Displacement** 5.2L (317 in.<sup>3</sup>)  
**Engine Power** 215 hp @ 2,500 rpm  
**Engine Torque** 520 lb.-ft. @ 1,600 rpm

**Oil Level Indicator** Dash-mounted oil level check switch and light

**ALTERNATOR** 140-amp

**BATTERIES** 2 Maintenance-Free Group 31 750-CCA

**TIRES LRR (Low Rolling Resistance)** 11R22.5 (14-pr) Standard

**STEERING** Integral Hydraulic Power

**STEERING COLUMN** Tilt and Telescopic

**FUEL TANK** 50 or 100 Gal. LH side mount based on wheelbase

**FUEL/WATER SEPARATOR** Dual fuel filter with dash mounted indicator light