
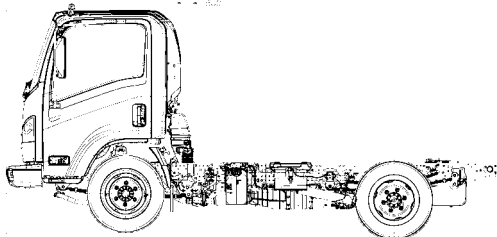


NQR DIESEL

STANDARD CAB

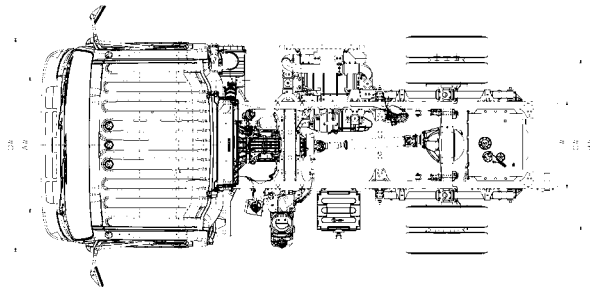

| Wheelbase (in.) | Cab to Axle (in.) | Cab to End of Frame (in.) | Back of Cab (in.) | Overall Length (in.) | Body Length (ft.) | Overall Width (in.) | Axle Width (in.) | Overall Height (in.) |
|-----------------|-------------------|---------------------------|-------------------|----------------------|-------------------|---------------------|------------------|----------------------|
| 109.0 | 86.5 | 129.6 | 7.7 | 200.5 | 10-12 | 81.3 | 65.6 | 92.4 |
| 132.5 | 110.0 | 153.1 | 7.7 | 224.0 | 14 | 81.3 | 65.6 | 92.4 |
| 150.0 | 127.5 | 170.6 | 7.7 | 241.5 | 16-18 | 81.3 | 65.6 | 92.4 |
| 176.0 | 153.5 | 196.6 | 7.7 | 267.5 | 18-20 | 81.3 | 65.6 | 92.4 |
| 200.0 | 177.5 | 220.6 | 7.7 | 291.5 | 22 | 81.3 | 65.6 | 92.4 |

| | |
|--|---|
| GVWR/GCWR | 17,950/23,950 lbs. |
| BODY/PAYLOAD ALLOWANCE | 10,939-11,461 lbs. |
| GAWR Front Rear | 6,830 lbs. 12,980 lbs. |
| FRONT AXLE CAPACITY | 6,830 lbs. |
| REAR AXLE CAPACITY Ratio | 14,550 lbs. 5.125 |
| SUSPENSION F/R SPRINGS Capacity | Tapered/Multi-Leaf 8,440/14,550 lbs. |
| FRAME Section Modulus Resistance Bending Moment | 7.20 in. ³ 316,800 lb.-in. |
| SERVICE BRAKES Front/Rear | Hydraulic Boosted with 4-Channel ABS Disc/Drum |
| EXHAUST BRAKE | Standard |
| TRANSMISSION | Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears |
| ENGINE Displacement Engine Power Engine Torque | Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215 hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm |
| OIL LEVEL INDICATOR | Dash-mounted oil level check switch and light |
| LIMITED SLIP DIFFERENTIAL | Optional |
| ALTERNATOR | 140-amp |
| BATTERIES | 2 Maintenance-Free 750-CCA |
| TIRES LRR (Low Rolling Resistance) | 225/70R19.5F (12-pr) Standard |
| STEERING | Integral Hydraulic Power |
| STEERING COLUMN | Tilt and Telescopic |
| FUEL TANK Standard Optional | 30 gal. in-rail 33 gal. side mount (176" WB Only) |
| FUEL/WATER SEPARATOR | Dual fuel filter with dash mounted indicator light |

2019 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

| Vehicle Coverage | Warranty Limitations (Time or Mileage, Whichever Comes First)* | | Percentage Of Dealer's Normal Charge Paid By Owner | |
|---|--|--------------------|--|-----------|
| | Time in years | Vehicle kilometres | Parts | Labor |
| Basic | 0-3 Years | Unlimited | No Charge | No Charge |
| Engine | 0-3 Years | Unlimited | No Charge | No Charge |
| • Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers • Flywheel Housing • Clutch Housing | 0-3 Years | Unlimited | No Charge | No Charge |
| Frame Rails | 0-3 Years | Unlimited | No Charge | No Charge |
| Cab Sheet Metal (Rust through) | 3-5 Years | Unlimited | 50% | 50% |
| Cab Sheet Metal (Corrosion) | 0-5 Years | Unlimited | No Charge | No Charge |
| Engine Emission Control System | 0-5 Years | 0-160,000 | No Charge | No Charge |
| Tire | 0-2 Years | 0-38,400 | No Charge | No Charge |

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. See your authorized Isuzu dealer for warranty details.